



presented at the 8th Weimar Optimization and Stochastic Days 2011
Source: www.dynardo.de/en/library

Sensitivity Analysis of Room Fire CFD-Simulations

Kathrin Grewolls

University of Central Lancashire, UK
Ingenieurbüro für Brandschutz Grewolls, Ulm

24. November 2011,
Weimarer Optimierungs- und Stochastiktage 8.0

Table of Contents

1 Introduction

- Fire Engineering
- Validation Tests

2 Sensitivity Analysis

- Parameters
- Results

3 Summary



Fire Engineering.


Need for Simulation.

- PRE: Assessment of safe evacuation time (ASET, RSET).
- PRE: Assessment of structural safety.
- POST: Fire investigation.

Software.

- Fire Dynamics Simulator (FDS)
- Software developed by the National Institute of Standards and Technology (NIST, USA) and the Technical Research Center of Finland (VTT)
- Numerical methods of computational fluid dynamics (CFD) adapted to the requirements of fire engineering

Required Safe Egress Time (RSET)

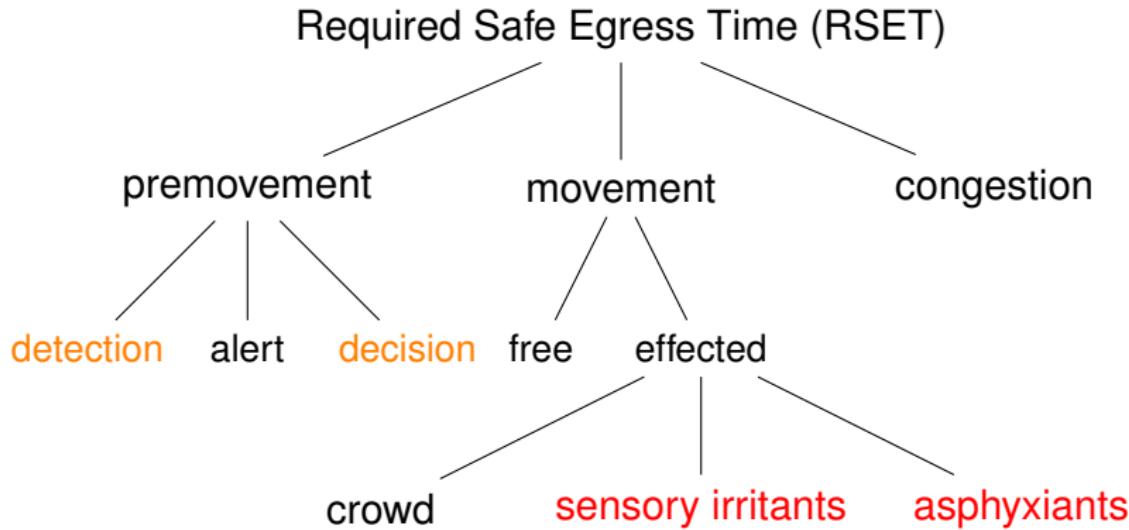




Available Safe Egress Time.

Irritants are impeding evacuation.

Asphyxiants lead to incapacitation.

Fractional Effective Dose (Purser):

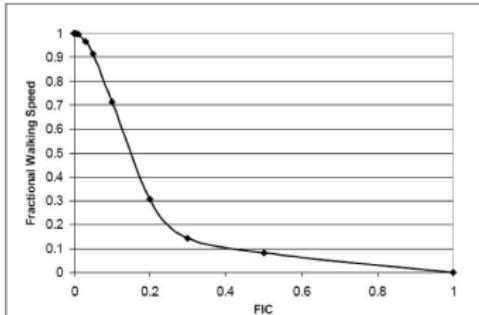

$$\text{FED}_{\text{Purser}}(t) = \max \left\{ \sum_{t=0}^{t^*} \left[(F_{\text{CO}}(t) + F_{\text{HCN}}(t) + F_{\text{LD}_{\text{irr}}}(t)) \cdot V_{\text{Hyp}}(t) + F_{\text{O}_2}(t) \right], \sum_{t=0}^{t^*} F_{\text{CO}_2}(t) \right\} < 0.3$$





Validation Tests

MULTIPLE PARAMETER MIXTURE FRACTION WITH TWO-STEP COMBUSTION CHEMISTRY FOR LARGE EDDY SIMULATION


Jason E. Floyd¹ & Kevin B. McGrattan²

¹Hughes Associates, Inc. USA

²Building and Fire Research Laboratory, National Institute of Standards and Technology, USA

INTRODUCTION

A common approach for treating combustion in practical fire models is to use the mixture fraction, a conserved scalar to which all gas species can be related. Typically, infinitely fast chemistry is assumed, in which case the technique works well for fires scenarios in which there is an adequate supply of oxygen. A somewhat more complex approach is to create flamelet libraries that map temperature and

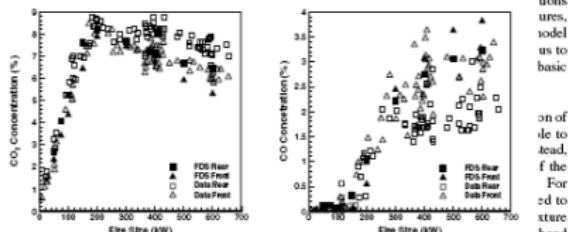

experiment, and a compartment fire experiment. All three sets of experiments involve relatively clean burning fuels because the emphasis is on CO, not soot, production.

MATHEMATICAL FORMULATION

The combustion model in the Fire Dynamics Simulator (FDS), version 4,^{1,2} uses only a single

Fire Safety Journal 44 (2009) 599–602



Contents lists available at ScienceDirect

Fire Safety Journal

journal homepage: www.elsevier.com/locate/firesaf



Round-robin study of *a priori* modelling predictions of the Dalmarnock Fire Test One

Guillermo Rein ^{a,*}, José L. Torero ^a, Wolfram Jahn ^a, Jamie Stern-Götz ^b,
Sylvain Desanghere ^{d,1}, Mariano Lizáro ^c, Frederick Mowrer ^f, Andrés Daniel Alvear ^e, Jorge A. Capote ^e, Allan Jowsey ^{a,b}, Cecilia Abecassi ^a

^a MRC Centre for Fire Safety Engineering, University of Edinburgh, Scotland, UK

^b Arup, London, UK

^c Pöcker Engineering Inc., Chicago, USA


^d CTICM, Paris, France

^e CEMAT, Universidad de Cantabria, Santander, Spain

^f Department of Fire Protection Engineering, University of Maryland, USA

^{*} Arup, San Francisco, USA

¹ Efector, Paris, France

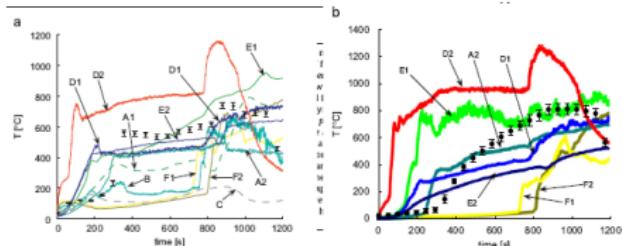


1. Introduction

behaviour, and design of fire safety. Modelling is being used to study fire dynamics in enclosures and to simulate flames, plumes,





Scattering of Input Parameters

Scattering of material parameters for different types of wood
(FDS pyrolysis model)

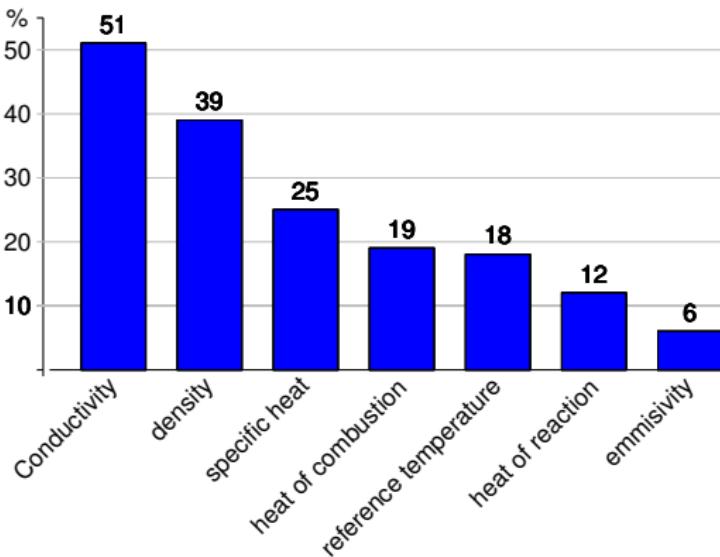

Model

UCLan Fire Toxicity Facility: ISO 9705 half scale room and corner test.

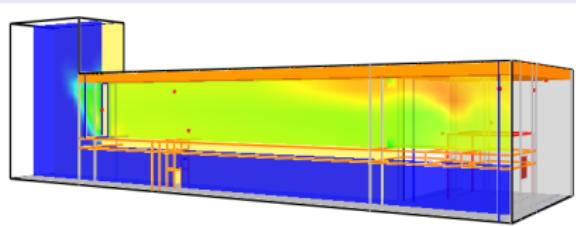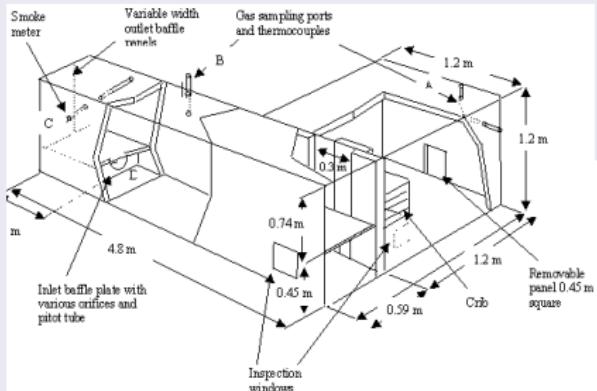


Sensitivity Analysis.


- Investigation of sensitivity of results to scattering of input parameters
- Different studies with 100 to 200 samples investigated with optiSLang 3.2.0
- Advanced Latin Hypercube Sampling



Coefficient of Importance (COI)

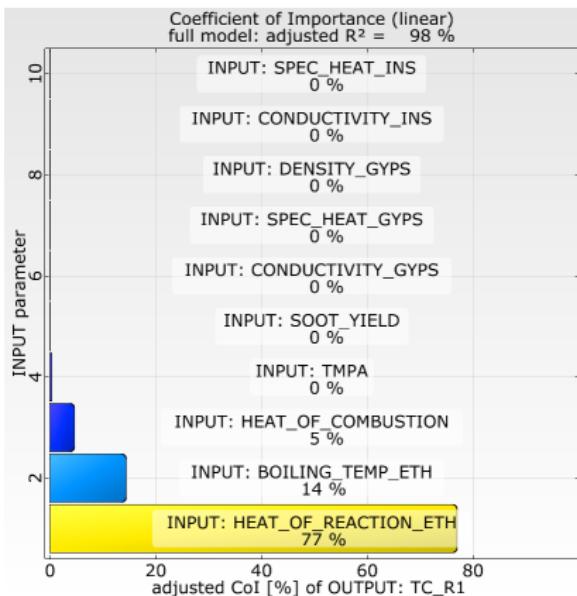


COI for the gas temperature below the ceiling in the room of fire origin

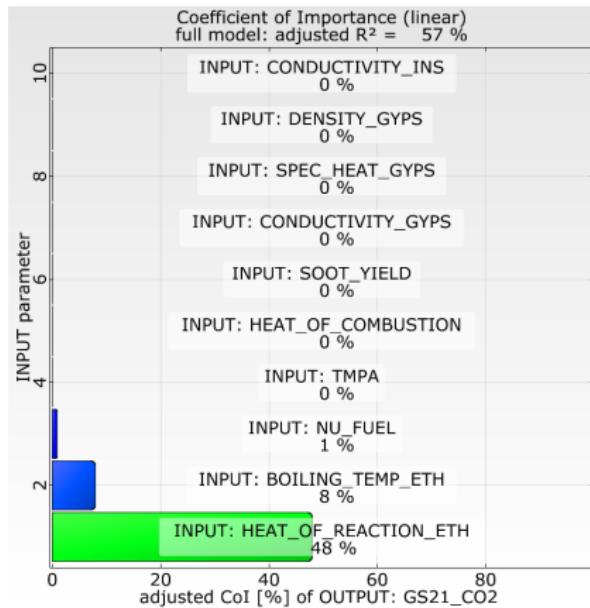

COI for the concentration of carbon dioxide close to the doorway



Metamodel of Optimal Prognosis (MOP)

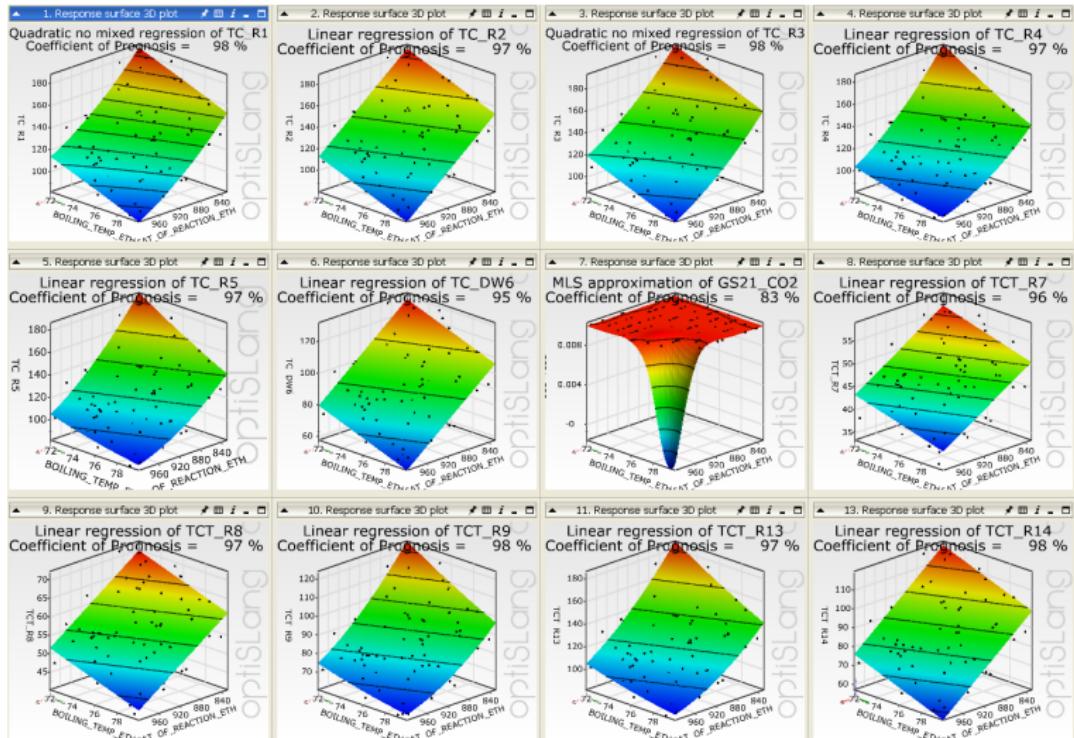

Summary

- Stochastic methods are appropriate to evaluate and improve the reliability of fire simulations.
- Significant sensitivities were observed for very few input parameters of fuel only: *heat of combustion, heat of reaction, boiling temperature*.
- Most input and output parameters are nearly linearly correlated. For carbon dioxide a strongly non-linear relationship to the fuel properties was identified.
- Further studies with varying ventilation will be carried out to investigate the dependencies of toxic gas concentrations on input parameters. The results can be used to improve combustion modelling.



Ferit Boysen, President & CO Fluent Inc.:

It is now possible for more people to get bad results from CFD faster and cheaper than ever before.



www.brandschutz-simulation.de

University of Central Lancashire

